

POWER YOUR FUTURE

**Cummins Generator
FD 200 CN**

6CTAA 8.3 G2

**Prime Power: 160KW/200KVA
Standby Power: 176KW/220KVA**



GENERATING POWER SOLUTIONS

Increased availability for new operations
Reliable, robust and versatile generator.
Ready to deliver power for a next job.

Increased uptime during operations
Once installed on the end-user-site, the generator will be ready to run: "peace of mind" operation.

Reduced transport and installation costs
The compact and robust design with integrated transport features enables faster and safer transport and installation.

Reduced service & maintenance costs
Longer service intervals.
Quicker and more efficient service jobs.

Premium resale value
Designed and built to last.

SAFETY

- Operate safely in accordance with proper operation manual.
- To prevent trouble and accidents, perform daily and preventive maintenance checks without fail.

Cummins Series

200KVA



PT. CIPTA DUA POWER FRANS DIESEL

Head Office : Jl. MT. Haryono No.19 Balikpapan

No telp : (0542) 878021

Branch Office: Jl. Wijaya Kusuma XI I 15 A Samarinda

No telp : (0542) 2089884

Ware House : Komp. Pergudangan Kariangau Balikpapan

Web : www.fransdieselpower.com

Technical Data

FD200CN

Model		FD200CN
Rated prime power	kva	200
Rated standard power	kva	220
Rated voltage line to line	V	400/230
Rated current	A	40
Maximun sound level	dB(@7m)	69

Engine-DCEC Cummins

Model	6CTAA 8.3 G2	
Aspiration	Air natural aspirated	
Fuel system	A type	
No. cylinders	6 in line	
Displacement	Liquid	8.3
Bore*Stroke	mm	114*135
Compression ratio	16.5	
Rated speed	r/min	1500
Rated net power(with fan)	Kw	24
Governor type	Mechanical/Electrical	
Start Motor	V	24

Exhaust System

Exhaust gas flow	m³/min	
Exhaust gas temp	°C	
Max back pressure	kPa	10

Aspiration System

Max inlet pressure	kPa	5
Combustion volume	m³/min	1.98
Air flow	m³/min	136

Fuel System

100% load(Prime power)	L/h	42
75% load(Prime power)	L/h	31.5
50% load(Prime power)	L/h	21
Fuel tank capacity	L	125

Lubrication System

Oil capacity	L	24
Oil consumption	g/kwh	219
Oil pressure	kPa	345
(continuous operation)		

Cooling System

Coolant capacity	L	21
Thermostat operation range	°C	82-95
Max water temperature	°C	104

Alternator

Model	FDIESEL	FD200CN
		UCI274H
Phase		3
Voltage	V	400/230
Wiring Type	3 Phase 4 wire, Y type	
Bearing		1
Power factor		0.8
Frequency	Hz	50
Prime power	KVA	200
Exciter Type	Brushless, self-excitation	
Voltage regulation	%	±0.5
Protection Grade		IP 23
Insulation grade		H/H
Altitude	m	1000

Controller-DEESEA

Model	DSE6120
-------	---------

Protective functions:

- Low oil pressure
- High water temperature
- High/low voltage
- High Engine Temperature and Overspeed.
- Voltage regulator frequency regulator
- Emergency stop
- Start failure



Control Module Options



- Auto generator control module
- Control module with " Three Remote Control" functions
- ATS auto load transfer screen
- Synchronising control modules
- Power output cabinet

Standard Features

- Engine(DCEC Cummins)
- Radiator 50°C max,fans are driven by be
- 24V charge alternator
- Alternator: single bearing alternator IP23, insulation class H/H
- Standard auto control system
- One set of air filter, fuel filter, oil filter
- Main line circuit breaker/MCCB
- Base fuel tank
- Two 24V batteries, rac and cable
- Exhaust system(Ripple flex exhaust pipe, exhaust siphon, flange, muffler)
- User manual

Options

- Battery charge
- Engine heater
- Alternator heater
- PMG
- Water oil separator
- Daily fuel tank
- Remote control panel
- Automatic transfer switch/ATS
- Switch box

Standard: Options:

Warranty*

Cummins Engine


12 months from date of purchase and 1000 hours.

Generator

12 months from date of purchase or 1000 hours (whichever occurs first).




Unit Dimensions(Basic unit)

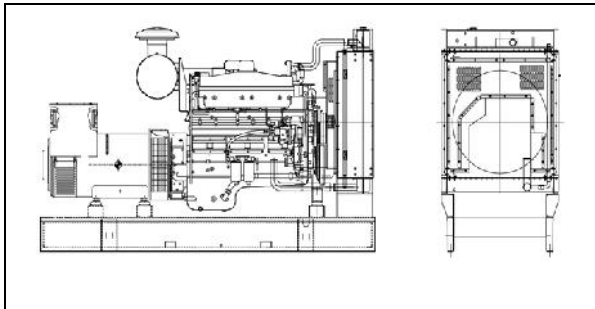


Open Type

L*W*H	mm	2550*1020-1680
Weight	kg	1700

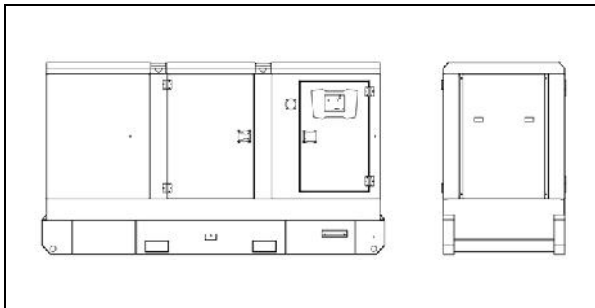

Silent Type

L*W*H	mm	3530*1350*2000
Weight	kg	2660

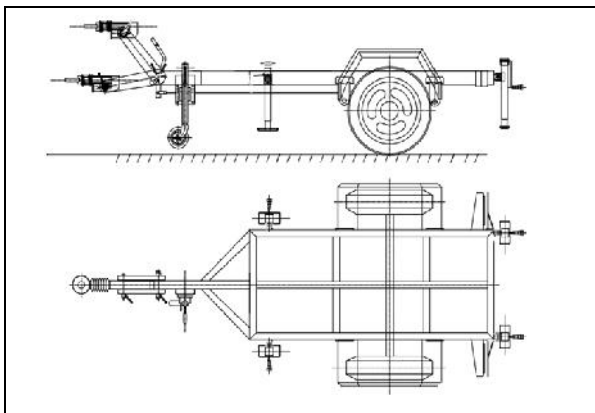

Trailer Option

L*W*H	mm	3568*2362*1360
Max loading weight	kg	2327

More information, pls refer to our web-site: www.longkaipower.com

Manufacturer reserves the right to make changes in model, technical specification, color, equipment and accessories without notice.